

### Tenax® strapping—polyester

Strap Name	Standard Color	Strap Width		Average Strength		Approximate Length per Coil		Approx. Coil Outside Dia.		Core Size Inside Dia.		Approximate Coil Width		Coil Weight	Standard Package	Strapping Application Methods	
		mm	inch	lbs	N	feet	m	inch	mm	inch	mm	inch	mm	lbs			
Tenax	1616LC	Green	9	.354	425	1 890	13,750	4 191	24	609	16	406	6	152	55	24 Coils/Pallet	MCD Power Strapping Machines
	1716LC		10.5	.413	475	2 110	11,550	3 520	24	609	16	406	6	152	55		MCD Power Strapping Machines,
	1718LC		10.5	.413	550	2 450	9,900	3 018	24	609	16	406	6	152	53		Pneumatic Tension-Weld Tools
	1816	Green	12	.468	500	2 220	10,500	3 200	24	609	16	406	6	152	51	12 Coils/Pallet	MCD Power Strapping Machines,
	1818		12	.468	600	2 670	9,000	2 740	24	609	16	406	6	152	51		Pneumatic Tension-Weld Tools,
	1822		12	.468	800	3 560	6,500	1 980	24	609	16	406	6	152	50		Hand Tools using metal seals

### High-Strength Tenax™

Strap Name	Standard Color	Strap Width		Average Strength		Approximate Length per Coil		Approx. Coil Outside Dia.		Core Size Inside Dia.		Approximate Coil Width		Coil Weight	Standard Package	Strapping Application Methods	
		mm	inch	lbs	N	feet	m	inch	mm	inch	mm	inch	mm	lbs			
High-Strength Tenax	2030	Green	15.6	.615	1100	4 890	4,600	1 400	24	609	16	406	6	152	50	24 Coils/Pallet	Power Strapping Machines, Hand Tools designed specifically for use with High-Strength Tenax
	2038	Green	15.6	.615	1260	5 600	3,600	1 098	24	609	16	406	6	152	52		
	2040*	Green	15.6	.615	1400	6 230	4,000	1 200	24	609	16	406	6	152	50		
	2080	Green	15.6	.615	1600	7 170	3,500	1 067	24	609	16	406	6	152	50		

\* 2040 High-Strength Tenax strapping is AAR approved.




## Self-contained Contrax strapping stations

### Handy strapper\*

The carry-carton kit contains 2,500 ft. of Type 844 12mm Contrax strapping. It can be ordered with or without 425 Steelock buckles.

### Dispensi-pak\*

Everything needed for strapping is contained in this portable package weighing less than 2 lbs. The Dispensi-pak includes 250 ft. of Type 844 12mm Contrax strapping and 40 Steelock buckles. (Only shipped in units of ten.)

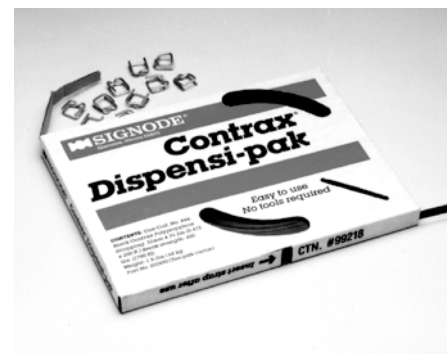

\* Use with a DLT tensioner is recommended. See Hand Tools SPD 1033-C