



Hand Tools

Steel/Manual sealers, front action

3610 W. Lake Ave. • Glenview IL 60025
1-800-323-2464

Front-action

Front-action sealer handles are held perpendicular to the strapping, usually in front of the operator who pushes the handles together close to chest. Generally for light-duty strapping applications.

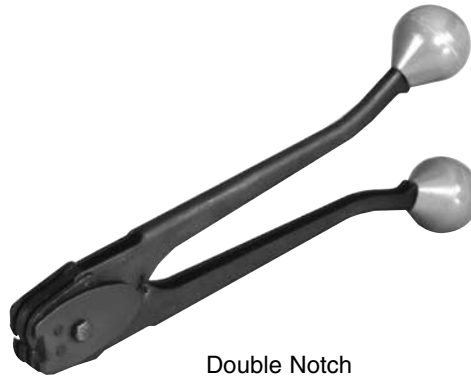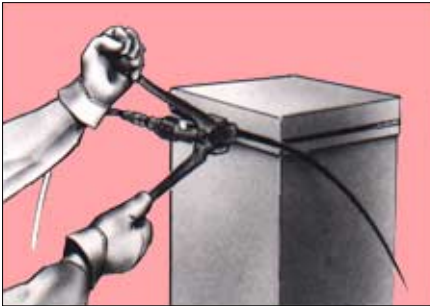

Double Notch
C-3820
C-1223
C-5823
C-3423



Single Reverse Notch
SRC-3820
SRC-1223
SRC-5823
SRC-3423

Manual sealer specifications

Sealer Model	Part Number	Description	Strap Size				Seals Used	Joint Type	Weight	
			Width		Thickness				lb	kg
			inch	mm	inch	mm				
C-3820	008600	Front-action	3/8	9.5	0.015–0.017	0.38–0.43	38C	Double Notch	3	1.4
SRC-3820	008620						38SPC	Single Reverse Notch		
C-1223	008605	Front-action	1/2	12.7	0.017	0.43	12C	Double Notch	3	1.4
SRC-1223	008625						12SPC	Single Reverse Notch		
C-5823	008610	Front-action	5/8	15.9	0.017	0.43	58C	Double Notch	3	1.4
SRC-5823	008630						58SPC	Single Reverse Notch		
C-3423	008615	Front-action	3/4	19.0	0.017	0.43	34C	Double Notch	3	1.4
SRC-3423	008635						34PNSC	Single Reverse Notch		