


Steel/Pneumatic combination push-type and sealless tools

Pneumatic push-type

Pneumatic push-type combination tools are used with push-type seals on irregular-shaped packages. Air power tensions, seals and cuts the strapping.

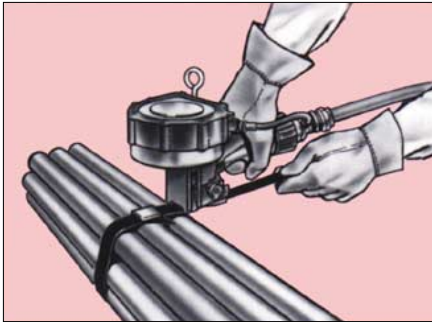

PRHM-34



PRHR-34
PRHR-114



PNSC-2-12
PNSC-2-58
PNSC-2-34

Pneumatic push-type combination tool specifications

Model	Part Number	Description	Maximum Strap Tension		Strap Size				Strap Type	Seal Used	Joint Type	Weight	
					Width		Thickness					lbs	kg
			lbs	N	inch	mm	inch	mm					
PNSC-2-12	422495	Push-Type	700	3 114	1/2	12.7	0.017-0.023	0.43-0.58	Apex Plus, Magnus	12 SPC	Single Reverse Notch	9.5	4.3
PNSC-2-58	422496		700	3 114	5/8	15.9	0.017-0.023	0.43-0.58	Apex Plus, Magnus	58 SPC			
PNSC-2-34	422497		700	3 114	3/4	19.0	0.017-0.025	0.43-0.64	Apex Plus, Magnus	34 PNSC			
PRHM-34	306700		1,600	7 120	3/4	19.0	0.025-0.031	0.64-0.79	Magnus	34 HOC	Double Reverse Notch	16	7.3
PRHR-34	424234		1,600	7 120	3/4	19.0	0.025-0.031	0.64-0.79	Magnus	34 HOC			
PRHR-114	423570		1,600	7 120	1-1/4	31.8	0.025-0.035	0.64-0.89	Magnus	114 P			

*A quick-disconnect plug is furnished with each of the above tools. It is essential that a filter-regulator-lubricator assembly (Part No. 173111) be installed before the tool on the air line.

Pneumatic sealless


These sealless combination tools seal strapping without using metal seals, saving time and money. Production interruptions for reloading as well as purchasing and inventorying of seals are eliminated.




Three key sealless joint—SLP



Four key, reverse lock, sealless joint—SPC

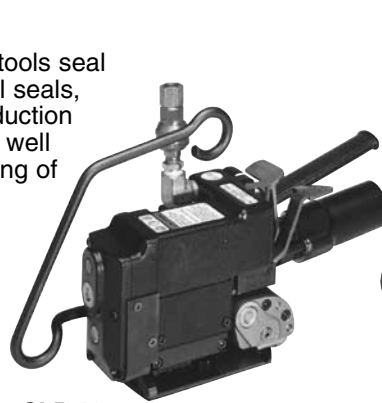

SLP-12
SLP-58
SLP-34

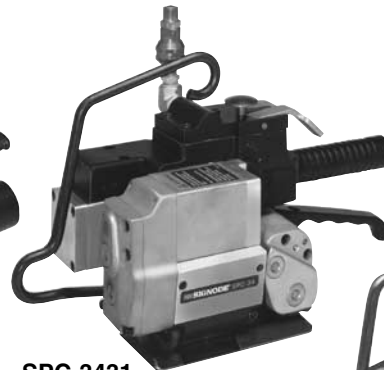

SPC-3431



SPC-114

Pneumatic sealless combination tool specifications

Model	Part Number	Description	Strap Tension		Sealless Joint Type	Strap Size				Strap Type	Base Length Under Strap		Weight	
						Width		Thickness			inch	mm	lbs	kg
			lbs	N		inch	mm	inch	mm					
SLP-12	422350	Sealless	900	4 003	3-key	1/2	12.7	0.017-0.023	0.43-0.58	Apex Plus, Magnus to 0.025	5	127	15	6.4
SLP-58	422355		1,200	5 340		5/8	15.9	0.017-0.023	0.43-0.58					
SLP-34	422360		1,200	5 340		3/4	19.0	0.017-0.025	0.43-0.64					
SPC-3431	422446		1,600	7 112	4-Key	3/4	19.0	0.025-0.031	0.64-0.79					
SPC-114	423125		3,200	14 080	4-Key	1-1/4	31.8	0.025-0.031	0.64-0.79	Magnus	7	178	37	16.8